

Product Data Sheet

Pro-Repair 10


When you're in a hurry reach for Gyprock Pro-Repair 10, a quick drying all-purpose jointing compound for use in repairs and on small-scale jointing jobs.

Product Overview

Pro-Repair 10 is a lightweight plaster based all-purpose compound used as all coats in a three coat jointing system or as a base coat only. this low VOC dry powder has been engineered with a super fast 10 minute working time after mixing. Use Pro-Repair 10 for all three coats with FibaFuse tape to ensure the project can be jointed and sanded on the same day after sufficient drying time.

Typical Applications

Gyprock Pro-Repair 10 is typically used as all coats in a three coat jointing system, for plasterboard and fibre cement in smaller residential and commercial wall and ceiling jointing projects. It is also ideal for patching holes and defects. Hand application is recommended given the short working time.

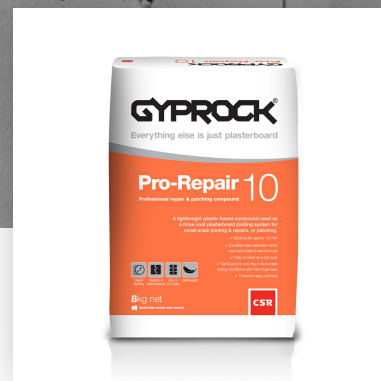

Rapid Setting

10 minute working time



All-purpose

Use for all coats of a 3 coat joint system



Repairs and Maintenance

Great for patching holes and defects

Technical Specifications

Product Options

Gyprock Pro-Repair 10 is available in the following pack size:

| | |
|----------|------------------------|
| Pack | 8kg Bag |
| Coverage | 13kg/100m ² |

Shelf life is 1 year from manufacture.

For product availability and to place an order, contact your **nearest supplier**.

Physical & Chemical Properties

| | |
|---------------------------------------|------------------------------------|
| Specific gravity (H ₂ O=1) | 1.0 - 1.6 |
| VOC content (as specified by GBCA) | <1 g/L as VOC content per material |

Product Manufacture

Gyprock Pro-Repair 10 is manufactured by CSR Gyprock in Australia to stringent product specifications.

Product Handling

Transportation and manual handling: Refer to the **Gypsum Board Manufacturers of Australia (GBMA) website** for recommended OH&S practices.

Storage: Store bags of compound in a dry environment, protected from the weather and out of direct sunlight. Tear bag open from top corner to dispense compound. Unused product which has been mixed with water should be discarded. Unused product in powder format should be stored in original bag: roll the top of the bag to loosely seal, and store in an airtight container.

Health and Safety

Safety Data Sheets are important documents in the construction industry and assist in the continuing focus on occupational health and safety on and off sites.

Installation Instructions

Installing to Standards

AS/NZS2589: Gypsum linings – Application and Finishing outlines the procedures for jointing and finishing of Gyprock plasterboard in conjunction with additional details contained in Gyprock Technical Literature.

Resources

Gyprock makes available [resources](#) that provide comprehensive selection, design, installation and maintenance guidance.



Manufactured for Life

Gyprock products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system.