

Product Data Sheet

# Total Coat-Lite


Gyprock Total Coat-Lite is lightweight all-purpose jointing compound. It's all you need for a three coat jointing system.

## Product Overview

Total Coat-Lite is a versatile all-purpose jointing compound used for all coats in a three coat jointing system. This low VOC formulation is available in a dry powder form and each coat dries and hardens in approximately 24 hours ready for recoating or sanding.

## Typical Applications

Gyprock Total Coat-Lite is typically used for each coat in a three coat jointing system in residential and commercial walls and ceilings. It is designed for application with hand tools, mud boxes, automatic tapers and other machine tools.

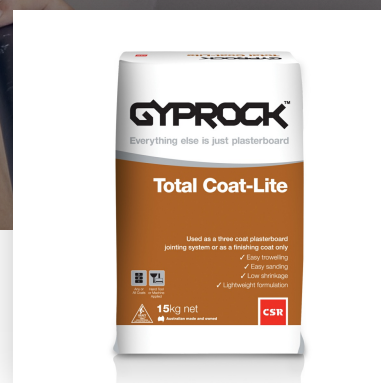

### All-purpose

Use for all coats of a 3 coat joint system



### Versatile Application

Hand and machine application

## Technical Specifications

### Product Options

Gyprock Total Coat-Lite is available in the following pack sizes:

Pack	15kg Bag
Coverage - Tape & Second Coat	13kg/100m <sup>2</sup>
Coverage - Topping Coat	4.5kg/100m <sup>2</sup>

For product availability and to place an order, contact your **nearest supplier**.

### Physical & Chemical Properties

Specific gravity (H <sub>2</sub> O=1)	1.1 - 1.5
VOC content (as specified by GBCA)	<10 g/L as VOC content per material

### Product Manufacture

Gyprock Total Coat-Lite is manufactured by CSR Gyprock in Australia to stringent product specifications.

### Product Handling

**Transportation and manual handling:** Refer to the **Gypsum Board Manufacturers of Australia (GBMA) website** for recommended OH&S practices.

**Storage:** Store bags of compound in a dry environment, protected from the weather and out of direct sunlight. Tear bag open from top corner to dispense compound. Unused product which has been mixed with water should be discarded. Unused product in powder format should be stored in original bag: roll the top of the bag to loosely seal, and store in an airtight container.

### Health and Safety

**Safety Data Sheets** are important documents in the construction industry and assist in the continuing focus on occupational health and safety on and off sites.

## Installation Instructions

### Installing to Standards

AS/NZS2589: Gypsum linings – Application and Finishing outlines the procedures for jointing and finishing of Gyprock plasterboard in conjunction with additional details contained in Gyprock Technical Literature.



#### Manufactured for Life

Gyprock products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system.



#### GECA Accredited

Verified by an independent conformity assessment body to meet the environmental, health and social/ethical criteria of the GECA Adhesives, Fillers & Sealants standard.



#### Certified Low VOC

Exceeds the GBCA specification for Volatile Organic Compound content according to independent testing.

### Resources

Gyprock makes available [resources](#) that provide comprehensive selection, design, installation and maintenance guidance.