



Product Data Sheet

Ultra-Base 60



Gyprock Ultra-Base 60 is a premium lightweight base coat with powerful antifungal properties to help protect occupants from the potential ill effects of mould and mildew.

Product Overview

Ultra-Base 60 is a setting type jointing compound with a working life of approx 60 minutes from application. Used for the first and second coat in a three coat jointing system, its powerful antifungal properties provide added mould resistance for the whole joint. It has been approved by the National Asthma Council Australia's Sensitive Choice® program as a better plasterboard choice for asthma and allergy sufferers.

Joints may be finished with any Gyprock topping or all-purpose compound and sanded smooth prior to decoration.

Typical Applications

Gyprock Ultra-Base 60 is typically used for the first and second coat in a three coat jointing system in residential and commercial walls and ceilings. Its antifungal properties make it perfect for jointing Gyprock Sensitive and Gyprock EC08 Complete in bathrooms, wet areas and laundries and throughout the homes of asthma and allergy sufferers. Ultra-Base 60 is designed for application with hand tools, mud boxes, automatic tapers and other machine tools.

Sensitive Choice®

CSR Gyprock is proud to be a partner of the National Asthma Council Australia's Sensitive Choice program. Research indicates that 2.3 million Australians suffer from asthma and over 30% of the population has allergies. The Sensitive Choice program identifies products that are a better choice for asthma, eczema and allergy sufferers.

Gyprock Sensitive, EC08 Complete and Ultra-Base 60 are low VOC products with superior mould resistance that are approved by the Sensitive Choice program as a better choice for asthma and allergy sufferers.



Powerful Antifungal Agent

Resists mould and mildew




Superior Tape Adhesion

Resulting in superior joint strength



Hand and Machine Tool Applied

Easy application with a range of tools

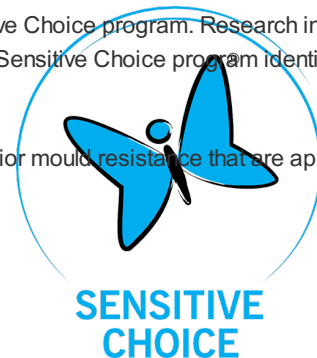

Technical Specifications

Product Options

Gyprock Ultra-Base 60 is available in a 16kg bag with a coverage of 13kg/100m².

It has a shelf life of 1 year from date of manufacture.

For product availability and to place an order, contact your nearest supplier.

Physical & Chemical Properties

Specific gravity (H ₂ O=1)	1.4 - 1.6
VOC content (as specified by GBCA)	<1 g/L as VOC content per material

Product Manufacture

Gyprock Ultra-Base 60 is manufactured by CSR Gyprock in Australia to stringent product specifications.

Product Handling

Transportation and manual handling: Refer to the Gypsum Board Manufacturers of Australia (GBMA) website for recommended OH&S practices.

Storage: Store bags of compound in a dry environment, protected from the weather and out of direct sunlight. Tear bag open from top corner to dispense compound. Unused product which has been mixed with water should be discarded. Unused product in powder format should be stored in original bag: roll the top of the bag to loosely seal, and store in an airtight container.

Health and Safety

Safety Data Sheets are important documents in the construction industry and assist in the continuing focus on occupational health and safety on and off sites.

Installation Instructions

Installing to Standards

AS/NZS2589: Gypsum linings – Application and Finishing outlines the procedures for jointing and finishing of Gyprock plasterboard in conjunction with additional details contained in Gyprock Technical Literature.

Resources

Gyprock makes available [resources](#) that provide comprehensive selection, design, installation and maintenance guidance.



Manufactured for Life

Gyprock products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system.



GECA Accredited

Verified by an independent conformity assessment body to meet the environmental, health and social/ethical criteria of the GECA Adhesives, Fillers & Sealants standard.



Sensitive Choice® Approved

Approved by the National Asthma Council Australia's Sensitive Choice® program as a better plasterboard choice for people with allergies and asthma.



Certified Low VOC

Exceeds the GBCA specification for Volatile Organic Compound content according to independent testing.