CEMINTEL

CEMENT INTELLIGENCE



SURROUND

CEMINTEL

New materials influence the way buildings are designed.

Cemintel is responding to the growing importance of external and internal cladding with Surround™.

Surround responds to the preference for high performance, lightweight materials and the desire for buildings to enhance the environment where we live.

From external façades to interior surfaces, Surround is a reinterpretation of cladding as we know it.

It's the future of building and it starts now.







THIS IS CEMINTEL **SURROUND** COLOUR. TEXTURE. PLAY.

WHY SURROUND?

Panels come **trimmed and sealed** and can be installed in a horizontal or vertical orientation using the Cemintel Commercial Expresswall® fixing system, enabling the creation of endless patterns and designs.

Colour matched rivets are available to accommodate the differential movement between the building structure and the façade. They also provide a more seamless aesthetic.

Only one rivet type is used for both gliding and fixing points, making panel installation uncomplicated.

Panels have superior weather resistance and strength compared to other fibre cement panels of similar thickness.

Prefinished coating is highly effective in repelling water which significantly reduces the risk of delamination that may occur in freeze/thaw conditions.

Each panel has a final sealant coating applied that will **better withstand weathering** over time, as well as environmental factors like **pollution and microclimatic conditions**, such as mould/algae.

Environmentally, the European manufacturing process of air curing means less CO2 emissions. Panels can be recycled for soil conditioning and do not pose a health risk for landfill disposal.








GREENISH // MARL







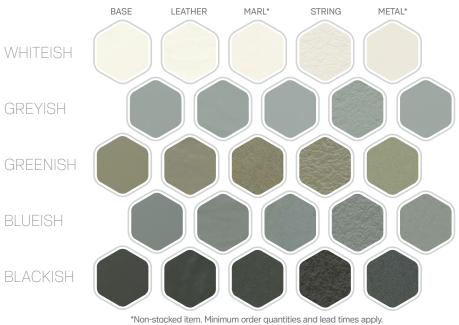

	Surround
CEMINTEL	(All colours)

Type of Building	Residential - BCA Classes 1 & 10	•
	Commercial & Other - BCA Classes 2-9	•
Where Used	Internal	•
	External	•
Application	Façades & Cladding	•
	Internal Linings	•
	Eaves & Soffits	•
	Flooring & Decking	
Finish	Prefinished	•
	Pre-Primed/Sealed	
Jointing Options	Express	•
	Visible	•
	Concealed (minimal visibility)	
Installation Format	Horizontal	•
	Vertical	•
Dimensions (mm)	Width x Length x Thickness	1200 x 3000 x 8mm

Note: Lengths up to 3050mm are available as special orders. Lead times, minimum order quantities and deposits apply.

SECONDARY PALETTE#



"Limited stock held otherwise minimum order quantites and lead times apply.